

# GRADALL<sup>®</sup>

## XL 5200<sup>III</sup>

### HYDRAULIC EXCAVATOR

XL 5200<sup>III</sup>



## SPECIFICATIONS

### Upperstructure Engine

Detroit Diesel OM904 Tier-3 diesel, 4 cycle, inline 4 cylinder, liquid cooled, electronic controlled. Vertical canister style lube filter attached to engine. Remote mount primary fuel/water separator.

Gross Rating: 173HP @ 2200 RPM (129kw)  
498 ft. lb. Torque @ 1200-1600 RPM (675Nm)  
Net Rating: 153 HP @ 2200 RPM (114kw)

Variable viscous fan clutch system. Vertical stacked hyd. oil cooler, charge air cooler and radiator

Maximum slope: 30°

12 volt starter, 100 amp alternator, two SAE #C31-S 1000 CCA batteries, two-stage dry type air cleaner with centrifugal precleaner and safety element. Evacuator valve and service indicator.

Fuel tank capacity: 99 gallons (375 L).

### Hydraulic System

#### PUMPS

One load-sensing, axial piston pump; oil flow 0-100 GPM (0-378 L/min).

One gear pump, pilot, 6GPM (00L/min)

#### SYSTEM MONITOR

Electronic monitor in cab indicates low hydraulic fluid level, high hydraulic fluid temperature, system working pressure, system pilot pressure.

#### SYSTEM SPECIFICATIONS

##### Six cylinders

- 1 tool: 4.25" ID, 3.0" rod (108 mm x 76 mm), 25.9" (658 mm) stroke.
- 2 hoist: 3.50" ID, 2.559" rod (121 mm x 85 mm), 31.0" (787 mm) stroke.
- 1 telescope: 3.75" ID, 2.75" rod (95 mm x 70 mm), 14' (4.27 m) stroke.

#### Three hydraulic motors

Swing, 64hp (48 kW); tilt, 21 hp (16 kW); 2 propel motors, 120 hp (89 kW) each.

#### Operating pressures:

Hoist	4,900 psi	(331 BAR)
Tilt	2,500 psi	(172 BAR)
Swing	3,000 psi	(207 BAR)
Tool	4,900 psi	(331 BAR)
Telescope	4,900 psi	(331 BAR)
Propel	4,900 psi	(331 BAR)
Pilot System	550 psi	(38 BAR)

#### Oil Capacity

Reservoir system 65 gallons (246 L).  
Pressurized reservoir with visual oil level gauges.

#### Filtration System

10 micron return filter, 10 micron pilot filter.

Fin and tube-type oil cooler with thermal by-pass and relief valves.

Pressure-compensated, load-sensing valves with circuit reliefs in all circuits.

### Operator Cab

All-weather cab with tinted safety glass windows, skylight, acoustical lining, four-way adjustable operator's seat, AM/FM radio, filtered fresh air heater, defroster, and A/C. Front window slides to overhead storage. Rearview mirrors on right and left sides. Standard equipment includes windshield wiper and washer, swing lights and work lights.

### Controls

Two electronic joysticks (hoist and bucket, telescope and swing), one rocker switch (tilt) control upperstructure. Joysticks mounted on arm pods, independently adjustable for individual operator comfort and convenience.

Quick change joystick pattern switch located on instrumental panel. Joysticks are self-centering; when controls are released, power for movement disengages and swing and tilt brake set automatically.

Two Electronic foot pedals (with handles) control crawler travel speed and direction, crawler steering, and crawler brakes. Toggle switch on arm pod allows selection of two crawler speed ranges.

#### Engine Controls and Instrumentation

Key operated ignition/starter switch, throttle, and main battery disconnect switch. air cleaner condition indicator. Electronic monitor indicates fuel level, low battery charge, lube oil pressure, high coolant temperature, engine rpm, and engine hours. Fuel saving auto idle feature sends engine rpm to idle when control circuits are in neutral for seven seconds.

### Swing

Priority swing circuit with axial piston motor. Planetary transmission.

Swing speed: 7.0 rpm.

#### Swing Brake

Automatic spring-set/hydraulic release wet disc parking brake. Dynamic braking is provided by the hydraulic system.

## Crawler Drive

Dual range, high torque piston motor powers each track. Three-stage planetary drive with integral speed limiting valve and automatic spring-set/hydraulic release wet disc parking brake.

**Travel Speed** n flat, level surface:

High Speed: 3.4 mph (5.5 km/h)

Low Speed: 1.9 mph (3.1 km/h)

Automatic two-speed control shifts crawler drive into low speed under difficult travel conditions. Manual override switch for loading the machine for transport.

### Gradeability

58%, limited by engine lubrication requirements.

### Drawbar Pull

38,324 lb (170 kN)

Individual Track Control  
Tracks counter-rotate to pivot machine about the swing centerline.

Electronically operated travel alarm signals crawler movement in either direction.

## Undercarriage Drive

### Rated Boom Force:

22,075 lb (98.2 kN)

### Rated Bucket Breakout Force:

19,300 lb (86 kN)

## Weight

Approximate working weight with 36" (914mm) excavating bucket, fuel tank half full, and no operator:

Pad Size	Weight	Bearing Pressure
31.5" 800mm	46,862 lb (21,256 kg)	5.7 psi (39.3 kPa)
23.6" 600mm	45,746 lb (20,750 kg)	7.3 psi (50.3 kPa)

## GRADALL Model XL 5200<sup>III</sup> Excavator Lift Capacity: LB (KG)

LOAD POINT HEIGHT		LOAD RADIUS										
		10' (3.0m)		15''' (4.6m)		20' (6.1m)		25' (7.6m)		Maximum Radius		
		Over End	Over Side	Over End	Over Side	Over End	Over Side	Over End	Over Side		Over End	Over Side
Above Ground Level	20' (6.1m)							5775 (2620)	5775 (2620)	26'10" (8.2m)	5270 (2390)	5270 (2390)
	15' (4.6m)			12350 (5600)	12350 (5600)	8850 (4015)	8850 (4015)	6610 (3000)	6610 (3000)	29'1" (8.9m)	5305 (2405)	5305 (2405)
	10' (3.0m)					10045 (4555)	10045 (4555)	7300 (3310)	7300 (3310)	30'4" (9.2m)	5410 (2455)	5410 (2455)
	BOOM LEVEL 7'9" (2.4m)					10405 (4720)	10405 (4720)	7510 (3405)	7510 (3405)	30'7" (9.3m)	5470 (2480)	5470 (2480)
	5' (1.5m)					10615 (4815)	10615 (4815)	7660 (3475)	7660 (3475)	30'7" (9.3m)	5555 (2520)	5555 (2520)
At Ground Level						10285 (4665)	10285 (4665)	7585 (3440)	7585 (3440)	30'1" (9.2m)	5730 (2600)	5730 (2600)
Below Ground Level	5' (1.5m)			11925 (5410)	11925 (5410)	9230 (4185)	9230 (4185)	7110 (3225)	7110 (3225)	28'7" (8.7m)	5925 (2690)	5925 (2690)
	10' (3.0m)	9340 (4235)	9340 (4235)	9330 (4230)	9330 (4230)	7875 (3570)	7875 (3570)	6385 (2895)	6385 (2895)	26'0" (7.9m)	6105 (2780)	6105 (2780)
	15' (4.6m)	6425 (2915)	6425 (2915)	7200 (3265)	7200 (3265)	6530 (2960)	6530 (2960)			21'11" (6.4m)	6170 (2800)	6170 (2800)
	20' (6.1m)									14'10" (4.5m)	5545 (2515)	5545 (2515)

**NOTE:** Bucket adjustment values are 87% of the actual bucket weights.

The above loads are in compliance with the SAE standard J1097 DEC2005. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Loads shown in shaded areas indicate the load is limited by tipping rather than hydraulic lift capacity.

The rated lift capacity is based on the machine being equipped with 15,500 lb (7030 kg) counterweight, standard boom, standard tires, no auxiliary hydraulics, and no bucket.

Adjust the listed rated capacities by subtracting the value listed for bucket/attachment used:

8065-6007 60" (1.5 m)	Ditching -	807 lbs (366 kg)
8065-6006 66" (1.7 m)	Ditching -	892 lbs (405 kg)
8065-6118 72" (1.6m)	Ditching -	1148 lbs (521 kg)
8045-6020 24" (610 mm)	Excavating -	603 lbs (274 kg)
8045-6020 30" (762 mm)	Excavating -	660 lbs (300 kg)
8045-6022 36" (914 mm)	Excavating -	741 lbs (336 kg)
8045-6023 42" (1.1 m)	Excavating -	841 lbs (382 kg)
8065-6117 48" (1.5 m)	Excavating -	959 lbs (435 kg)
8065-6013 72" (1.8 m)	Dredging -	1114 lbs (505 kg)

8065-6102 40" (1.0 m)

8065-6024 8" (2.4 m)

8065-6009 Single Tooth

Pavement -

Blade -

Ripper -

1262 lbs (573 kg)




630 lbs (285 kg)

557 lbs (253 kg)

The load point is located on the bucket pivot point, including loads listed for maximum radius.

Do not attempt to lift or hold any load greater than these rated values at specified load radii and heights. The weight of slings and any auxiliary devices must be deducted from the rated load to determine the net load that may be lifted.

**ATTENTION:** All rated loads are based on the machine being stationary and level on a firm supporting surface. The user must make allowance for particular job conditions such as soft or uneven ground, out of level conditions, side loads, hazardous conditions, experience of personnel, etc. The operator and other personnel must read and understand the operator manual before operating this machine. Rules for safe operation of equipment must be adhered to at all times.

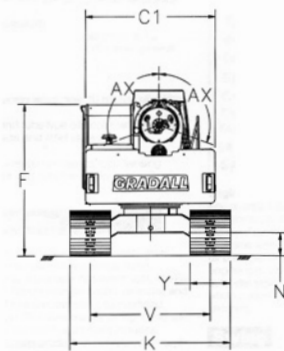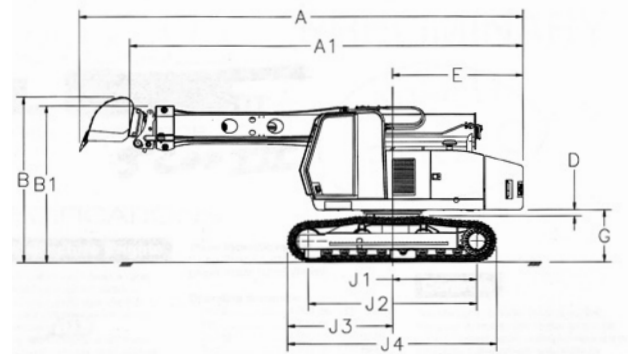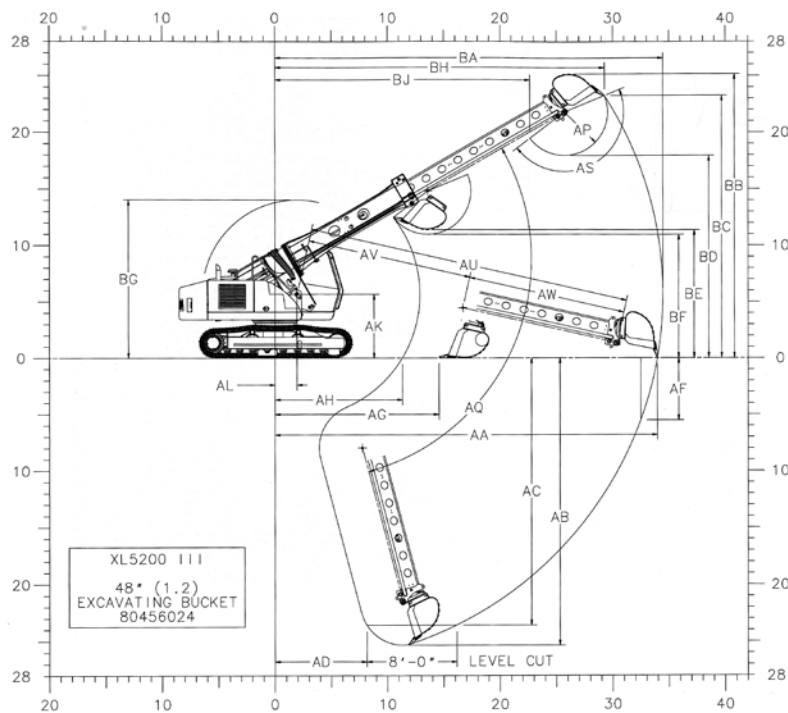

## Dimensions

<b>A</b>	Overall length with bucket: 28'11" (8.8)	<b>AV</b>	Minimum telescoping boom length (boom pivot to bucket pivot): 14'4" (4.5)
<b>A1</b>	Overall length without bucket: 25'8" (7.8)	<b>AW</b>	Telescoping boom travel: 14'0" (4.3)
<b>B</b>	Overall height with bucket: 10'9" (3.3)	<b>AX</b>	Bucket tilt angle (both sides of center): 110°
<b>B1</b>	Overall height without bucket: 10'2" (3.1)	<b>BA</b>	Maximum radius of working equipment (165° pivot): 34'5" (10.5)
<b>C1</b>	Width of upperstructure: 8'6" (2.6)	<b>BB</b>	Maximum height of working equipment: 25'2" (7.7)
<b>D</b>	Minimum clearance, upperstructure to undercarriage: 5" (130 mm)	<b>BC</b>	Maximum bucket tooth height: 23'3" (7.1)
<b>E</b>	Swing clearance, rear of upperstructure: 8'6" (2.6)	<b>BD</b>	Minimum clearance of bucket teeth with bucket pivot at maximum height: 17'11" (5.5)
<b>F</b>	Top of cab to groundline: 9'10" (3.0)	<b>BE</b>	Minimum clearance of fully curled bucket at maximum boom height (165° pivot): 11'5" (3.5)
<b>G</b>	Clearance, upperstructure to groundline: 3'5" (1.0)	<b>BF</b>	Minimum clearance of bucket teeth at maximum boom height: 10'11" (3.3)
<b>J1</b>	Axis of rotation to centerline of drive sprockets: 5'1" (1.7)	<b>BG</b>	Maximum height of working equipment with bucket below groundline: 14'0" (4.3)
<b>J2</b>	Nominal distance between centerlines of drive sprockets and idlers: 11'0" (3.4)	<b>BH</b>	Radius of bucket teeth at maximum height (165° pivot): 29'3" (8.9)
<b>J3</b>	Axis of rotation to end of track assembly: 6'10" (2.1)	<b>BJ</b>	Minimum radius of bucket teeth at maximum bucket pivot height (165° pivot): 22'8" (6.9)
<b>J4</b>	Nominal overall length of track assembly: 13'8" (4.2)		
<b>K</b>	Width of crawler (Standard): 10'6" (3.2)		
	Width of crawler (Optional): 9'10" (3.0)		
<b>N</b>	Ground clearance (per SAE J1234): 18" (454 mm)		
<b>V</b>	Track gauge, roller centerline to roller centerline: 7'10" (2.4)		
<b>Y</b>	Width of crawler track assembly (Standard): 31.5" (800 mm)		
	Width of crawler track assembly (Optional): 23.6" (600 mm)		
<b>AA</b>	Maximum radius at groundline (165° pivot): 33'11" (10.3)		
<b>AB</b>	Maximum digging depth (165° pivot): 25'4" (7.7)		
<b>AC</b>	Maximum depth for 8' level cut: 23'7" (7.2)		
<b>AD</b>	Minimum radius for 8' level cut at depth "AC": 8'2" (2.5)		
<b>AF</b>	Maximum depth of vertical wall which can be excavated: 5'6" (1.7)		
<b>AG</b>	Minimum level cut radius with bucket flat on groundline: 14'7" (4.4)		
<b>AH</b>	Minimum radius at groundline: 11'4" (3.5)		
<b>AK</b>	Boom pivot to groundline: 5'8" (1.7)		
<b>AL</b>	Boom pivot to axis of rotation: 1'11" (585 mm)		
<b>AP</b>	Bucket tooth radius: 3'10" (1.2)		
<b>AQ</b>	Boom pivot angle: 30° Up and 75° Down		
<b>AS</b>	Bucket pivot angle: 165°		
<b>AU</b>	Maximum telescoping boom length (boom pivot to bucket pivot): 28'8" (8.7)		

### Transport dimensions without attachment

Length: 25' 8" (7.8)

Height: 10' 2" (3.1)

Width: 10' 6" (3.2)

Metric units are meters (m) unless noted

Machines shown may have optional equipment

## Optional Equipment

Vandalism protection kit including window covers.

Intake air pre-cleaner.

Exhaust spark arrestor.


Strobe light.

Block heater.


Auxiliary Hydraulics - Additional hoses and piping for hydraulic powered attachments.  
[Maximum pressure 4800 psi (33,095 kPa)  
Maximum flow 30 GPM (114 L/min)]

## Attachments


Quick change and reversible buckets fabricated of steel plate, with high strength, low alloy cutting edges and wear strips. Standard attachments available for wide range of applications. Capacities shown are in heaped cu. yd.



8045-6020	24" (610mm)	Excavating bucket	Cu. yd.	m3
			3/8	.31
8045-6021	30" (762mm)	Excavating bucket	1/2	.41
8045-6022	36" (914mm)	Excavating bucket	5/8	.54
8045-6023	42" (1.07m)	Excavating bucket	3/4	.64
8045-6024	48" (1.22m)	Excavating bucket	1	.76

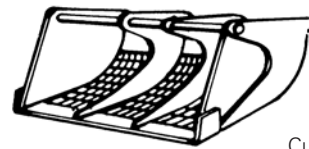


8065-6013	72" (1.83m)	Dredging bucket	Cu. yd.	m3
			1 1/8	.87

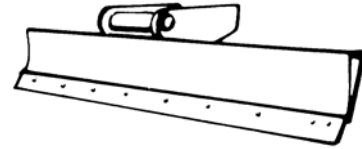


8065-6024 8' (2.4m) Grading blade




8065-6104	15" (381mm)	Trenching bucket	Cu. yd.	m3
			1/5	.15
8065-6012	21" (533mm)	Trenching bucket	1/4	.19

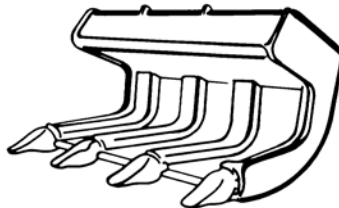


8065-6102	40" (1.02m)	Pavement removal bucket		
8065-6115	18" (.457m)	Pavement removal bucket		
8065-6116	24" (.610m)	Pavement removal bucket		
8065-6114	28" (.711m)	Pavement removal bucket		

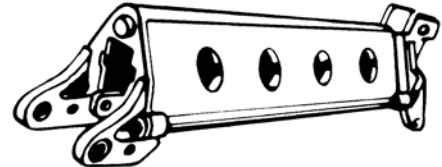


8065-5028 4' (1.2m) Boom extension  
8065-5029 6' (1.8m) Boom extension  
8065-5030 8' (2.4m) Boom extension

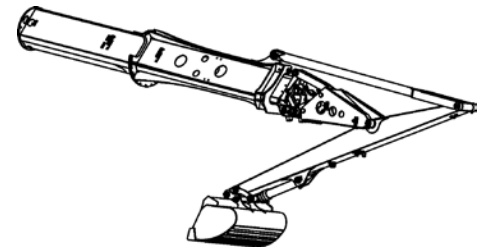


8055-5001 Telestick attachment

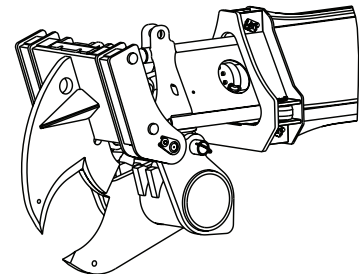


8045-5052 Tree Limb Shear Attachment

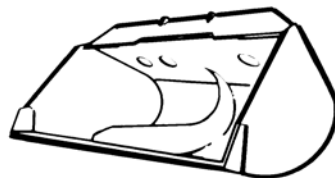

8065-6040	30" (.762m)	Ditching bucket	Cu. yd.	m3
			3/8	.3
8065-6007	60" (1.52m)	Ditching bucket	7/8	.73
8065-6006	66" (1.68m)	Ditching bucket	1	.76
8065-6002	72" (1.83m)	Ditching bucket	1 1/8	.87

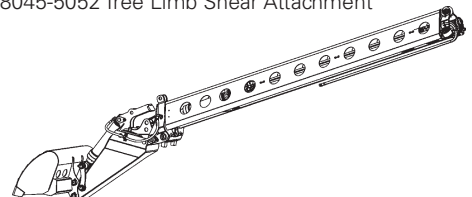

8045-5009 6' (1.8 m) Live Boom

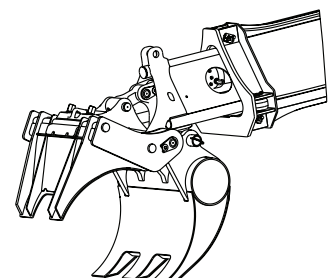

8075-5023 Fixed thumb grapple

It is Gradall Policy to continually improve its products. Therefore designs, materials and specifications are subject to change without notice and without incurring any liability on units already sold. Units shown may have optional equipment.

# GRADALL®

406 Mill Ave. SW, New Philadelphia, Ohio 44663  
Phone: 330-339-2211 Fax: 330-339-8468  
www.gradall.com



Certified ISO 9001

